

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 346 926 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

24.09.2003 Bulletin 2003/39

(51) Int Cl.7: **B65D 81/32**

(21) Application number: **03251666.8**

(22) Date of filing: **17.03.2003**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

Designated Extension States:

AL LT LV MK

(72) Inventor: **Wagner, John**

Cheshire CH2 1NN (GB)

(74) Representative: **Wilson Gunn M'Caw**

**41-51 Royal Exchange,
Cross Street
Manchester M2 7BD (GB)**

(30) Priority: **18.03.2002 GB 0206343**

(71) Applicant: **PZ Cussons (International) Limited**
Stockport, Cheshire SK3 0XN (GB)

(54) Dispenser for at least two fluids

(57) A fluid dispenser (11) for delivering fluids from at least two separate reservoirs has a dispensing arrangement comprising a reservoir outlet (17, 18) from each of the reservoirs. Each reservoir outlet (17, 18) di-

rects the flow of fluid from their respective reservoir towards a baffle (22) located between the outlets (17, 18). The fluid is dispensed in a single stream from a discharge aperture (19).

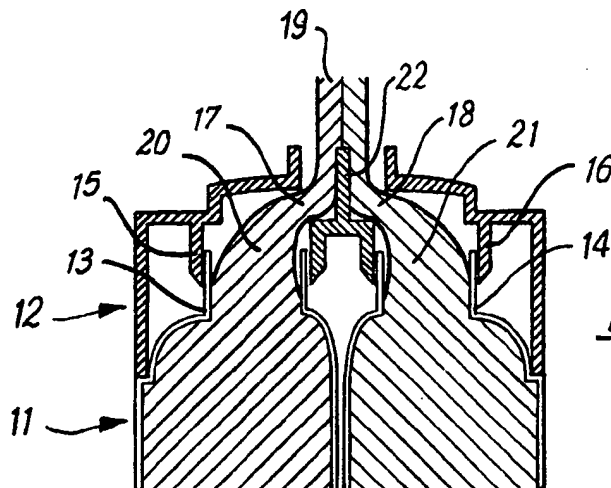


FIG. 1

EP 1 346 926 A1

Description

[0001] The present invention relates to a fluid dispenser. By fluid we mean any mobile substance such as a liquid, gas, cream or gel, although the present invention has particular, but not exclusive, application in the field of personal care products such as bath liquids, shower gels or cosmetic creams.

[0002] It is common to dispense products from flexible containers by either pouring low viscosity products or compressing or squeezing the walls of the container for higher viscosity creams or gels. For example, various mobile products such as shower gels and creams are commonly dispensed from bottles, tubes or film packs in this way.

[0003] For a dual product system, where both products need to be kept apart in separate compartments before delivery and intimate contact is required after delivery, it is difficult to place the two orifices close enough together to obtain mixing. This can also lead to cross contamination of the products by sucking back of the mixture into the individual compartments. Separated orifices need to be angled towards each other in order to achieve intimate contact on delivery and prevent contamination.

[0004] The problem in achieving this direction delivery with a viscous product, such as a gel is demonstrated by Pouseuille's law, which states that the pressure needed to dispense a fixed volume of liquid through a fixed orifice size increases with the viscosity of the product. This law has two implications to product delivery:-

1. For a higher viscosity product, insufficient pressure is developed by squeezing to direct the two product flows resulting in two separate product streams.
2. For low viscosity products poured from a dual neck bottle, the force of gravity is insufficient to deflect the product flow.

[0005] The present invention has been made from a consideration of this problem.

[0006] According to the present invention there is provided a fluid dispenser for delivering fluids from at least two separate reservoirs, wherein the fluid dispenser has a dispensing arrangement comprising an outlet from each of the reservoirs, which reservoir outlets direct the flow of fluid from their respective reservoir towards a baffle located between the said reservoir outlets.

[0007] On leaving the dispenser the fluids that are dispensed are delivered in intimate contact in a single stream, not two separate streams. The invention has particular, but not exclusive, application to the dispensing of liquids, creams, or gels with a viscosity of 100,000 cps or less measured on a Brookfield viscometer (model No. RDVI+, C spindle 4 speed 20) at room temperature (20°C). The products need to be kept apart and combine into a single stream only on dispensing which then, in a

preferred embodiment of the invention, brings about mixing or starts a chemical reaction. The mixed product would have particular, but not exclusive, application as a personal cleansing composition.

[0008] In a preferred embodiment of the invention the said fluids are each dispensed via reservoir outlets that face the baffle. These outlets both meter and direct the flow of products towards the baffle. The baffle may be straight, for example for higher viscosity fluids, or curved to allow better sealing, for example where lower viscosity fluids are used.

[0009] The fluid preferably exits the dispenser via a discharge aperture. The discharge aperture is ideally larger than the combined area of the reservoir outlets.

This provides a "siphon break" in the fluid flows and further prevents sucking back either mixed fluids or individual fluids into the wrong reservoir. The baffle ideally extends to the mouth of the discharge aperture, which is preferably located at the end of a neck.

[0010] To provide even further mixing of the two fluids after delivery without giving rise to sucking back, a mixing device can be fixed at the discharge aperture; i.e. after the dual reservoir outlets and baffle plate. This mixing device can be a flexible diaphragm, with a slit or multi-slit orifice arranged in a cross or star pattern, or a solid flow deflector. This device causes turbulence in the discharged products to give a marked effect on mixing the products or the speed of chemical reaction. Ideally this mixing device is in the form of a cap over a bottle neck, with said slit arrangement being provided in the cap.

[0011] In order that the present invention may be more readily understood it will be described by way of example only with reference to the accompanying drawings in which:-

Fig.1 is a diagrammatic cross section through part of one fluid dispenser in accordance with the present invention;

Fig.2 is a plan view of the fluid dispenser of Fig.1;

Fig.3 is a section along the line A-A of Fig.2;

Fig.4 is an underplan view of the fluid dispensing cap of Fig.1;

Fig.5 is a section along the line B-B of Fig.4;

Fig. 6 shows a further embodiment of a fluid dispensing cap in accordance with the present invention; and

Fig.7 is a plan view of the cap of Fig.6.

[0012] Referring to Figs. 1 to 5 a two chambered bottle 11 made of flexible plastics, only part of which is shown, is secured to a cap 12. The multi-chambered bottle would conventionally be made in two separately moulded parts which are secured together or blown from a single parison.

[0013] The two individual parts of the bottle each have a neck 13,14 which is secured to a corresponding closure 15,16 for that neck, and formed as an integral part of the cap 12. Each individual part contains a reservoir

of fluid, which fluids when mixed together would react. However, the fluids are stored separately in said individual bottle parts. A metering reservoir outlet 17,18 is provided in each closure, the two metering outlets 17,18 both facing radially inwardly, i.e. they are located on the side of each closure and face inwardly. The two metering outlets facilitate the dispensing of the fluids in a manner so as to direct the dispensed fluids towards each other; i.e. in a direction roughly perpendicular to the direction of travel of fluid through a discharge aperture 19 from the fluid dispenser.

[0014] On squeezing the flexible walls of the dispenser, product from the individual reservoirs in the individual bottle parts exits the reservoir metering outlets 17, 18. Initial mixing of the two fluids 20,21 is prevented by a baffle 22 located between the two outlets 17,18. The two fluid products are thus delivered via the metering outlets 17,18 and directed towards each other at right angles onto opposing faces of the dividing baffle plate 22 located in the discharge aperture 19. Both separate product streams then flow down the baffle plate and combine together into a single stream on exit via discharge aperture 19.

[0015] Preferably the cross-sectional area of the discharge aperture 19 is larger than the combined cross-sectional area of the metering outlets 17,18. This arrangement breaks the continuous product stream very much reducing the risk of cross contamination by sucking back.

[0016] Thus on squeezing the walls of the bottle parts, for a viscous liquid or pouring a thinner liquid by gravity, the dispenser described above delivers both products in intimate contact immediately on dispensing; i.e. in a single continuous stream rather than separate streams. The dispenser also prevents cross-contamination from one side to another as a consequence of sucking back and dispenses both products simultaneously in approximately the same volume.

[0017] To further mix the products Figs. 6 and 7 show a cap 23, fitted over the dispenser neck, having in the top thereof the discharge aperture. The discharge aperture is in the form of a slit or other arrangement of one or more perforations therethrough. This induces turbulence into the combined product flow and hence enhances mixing or accelerates any chemical reaction, resulting from a mixing of the individual fluid products from the two individual bottle parts.








[0018] It is to be understood that the above described embodiment is by way of illustration only. Many modifications and variations are possible.

direct the flow of fluid from their respective reservoir towards a baffle located between the reservoir outlets.

- 5 2. A fluid dispenser as claimed in claim 1, wherein the baffle is straight.
3. A fluid dispenser as claimed in claim 1, wherein the baffle is curved.
- 10 4. A fluid dispenser as claimed in any of claims 1, 2 or 3, wherein the fluids exit the dispenser via a discharge aperture.
- 15 5. A fluid dispenser as claimed in claim 4, wherein the discharge aperture has a larger cross-sectional area than the combined cross-sectional area of the reservoir outlets.
- 20 6. A fluid dispenser as claimed in claim 4 or claim 5, wherein the bottle extends to the mouth of the discharge aperture.
- 25 7. A fluid dispenser as claimed in any of claims 4 to 6, wherein the discharge aperture is provided at a mouth of a neck in the fluid dispenser.
- 30 8. A fluid dispenser as claimed in any of claims 4 to 7, wherein a diaphragm is provided over the discharge aperture, at least one perforation being provided through the diaphragm.

Claims

1. A fluid dispenser for delivering fluids from at least two separate reservoirs, wherein the fluid dispenser has a dispensing arrangement comprising an outlet from each of the reservoirs, which reservoir outlets

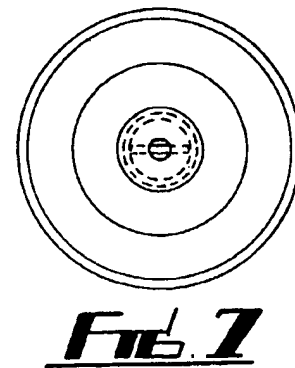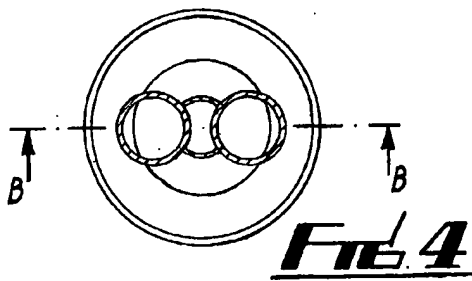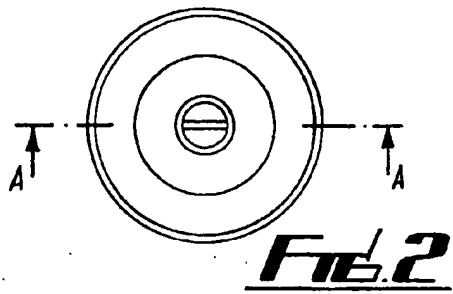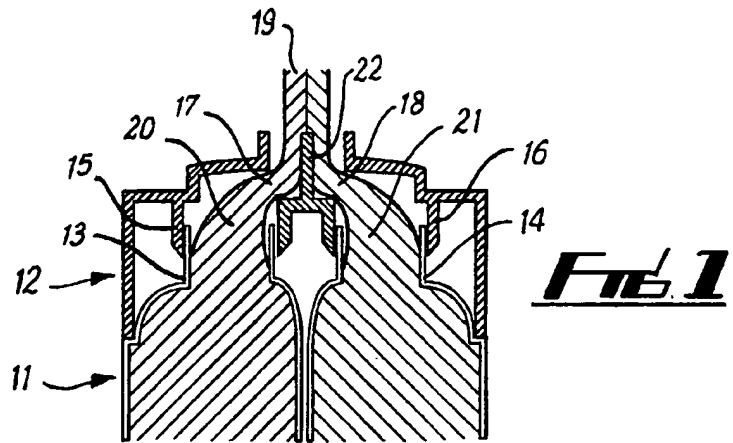



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 1666

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 42 19 598 A (CREATECHNIC) 23 December 1993 (1993-12-23)	1-7	B65D81/32
Y	* the whole document *	8	
Y	US 6 230 935 B1 (MACK ET AL) 15 May 2001 (2001-05-15) * column 4, line 37 - line 59 * * column 6, line 58 - line 67 * * column 7, line 26 - line 43; figures 1,4,8-13 *	8	
X	WO 97 18144 A (COURTAULDS PACKAGING) 22 May 1997 (1997-05-22) * page 4, line 20 - page 5, line 2 * * page 5, line 18 - page 8, line 3; figures 1-6 *	1-7	
X	US 5 318 203 A (IAIA) 7 June 1994 (1994-06-07) * column 3, line 34 - column 4, line 30; figures 1-11 *	1-7	
X	WO 94 19251 A (NORDEN PAC DEVELOPMENT) 1 September 1994 (1994-09-01) * page 4, line 26 - page 6, line 26; figures 1-6 *	1-7	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
X	WO 97 18138 A (COURTAULDS PACKAGING) 22 May 1997 (1997-05-22) * page 3, line 10 - line 22 * * page 4, line 11 - page 6, line 21; figures 1-3 *	1-7	B65D
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 July 2003	Examiner Martens, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (Pdc031)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03.25.1666

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-07-2003

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
DE 4219598	A	23-12-1993	DE	4219598 A1	23-12-1993
US 6230935	B1	15-05-2001	AU	6649896 A	26-02-1997
			DE	69602099 D1	20-05-1999
			DE	69602099 T2	09-12-1999
			EP	0842101 A1	20-05-1998
			WO	9705040 A1	13-02-1997
WO 9718144	A	22-05-1997	AT	209148 T	15-12-2001
			CA	2237860 A1	22-05-1997
			DE	69617260 D1	03-01-2002
			DE	69617260 T2	25-07-2002
			DK	861200 T3	13-05-2002
			EP	0861200 A2	02-09-1998
			WO	9718144 A2	22-05-1997
			GB	2322616 A , B	02-09-1998
			JP	2000500105 T	11-01-2000
			US	6065643 A	23-05-2000
US 5318203	A	07-06-1994	AU	7456894 A	24-01-1995
			BR	9406859 A	26-03-1996
			DE	69422287 D1	27-01-2000
			DE	69422287 T2	18-05-2000
			WO	9501287 A1	12-01-1995
			EP	0705202 A1	10-04-1996
			ES	2140550 T3	01-03-2000
			ZA	9404678 A	29-12-1995
WO 9419251	A	01-09-1994	AT	153952 T	15-06-1997
			DE	69311375 D1	10-07-1997
			DE	69311375 T2	22-01-1998
			EP	0684924 A1	06-12-1995
			JP	8507740 T	20-08-1996
			WO	9419251 A1	01-09-1994
WO 9718138	A	22-05-1997	CA	2237878 A1	22-05-1997
			EP	0861196 A1	02-09-1998
			WO	9718138 A1	22-05-1997
			GB	2322615 A , B	02-09-1998
			JP	2000500104 T	11-01-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82